

# Tollaust Pty Ltd

## Lane Cove Tunnel

### CO In Tunnel Air Quality Monitoring

### Validated Report

1<sup>st</sup> September 2014 – 30<sup>th</sup> September 2014

Report No.: DAT8697

Report issue date: 08/10/2014

Maintenance contract: MC1072

**ECOTECH PTY LTD. ABN: 32005752081**

**1492 Ferntree Gully Rd, Knoxfield VIC. 3180. AUSTRALIA**

**Tel No: 1300 364 946 Fax No: 1300 668 763**

**Email [ecotech@ecotech.com](mailto:ecotech@ecotech.com) WEB [www.ecotech.com](http://www.ecotech.com)**

This document shall not be reproduced except for in full, without the written approval of Ecotech Pty Ltd.

---

## Lane Cove Tunnel & Military Road E-Ramp

Report No: DAT8697

Tollaust Pty Ltd

Customer Details	
Customer	Tollaust Pty Ltd
Contact name	Greg Byrnes
Address	5 Sirius Road, Lane Cove West, NSW 2066
Email	<a href="mailto:GByrnes@transurban.com">GByrnes@transurban.com</a>
Phone	(02) 9937 1240

Revision History			
Revision	Report ID	Date	Analyst
0	DAT8697	08/10/2014	Pedro Cascão

Report by:

Pedro Cascão



Approved Signatory:

Jon Alexander



### Table of Contents

<b>Customer Details</b> .....	<b>2</b>
<b>Revision History</b> .....	<b>2</b>
<b>Table of Contents</b> .....	<b>3</b>
<b>List of Figures</b> .....	<b>4</b>
<b>List of Tables</b> .....	<b>4</b>
Executive Summary .....	5
1.0 Introduction .....	6
2.0 Monitoring and Data Collection.....	6
<b>2.1. Siting Details</b> .....	<b>6</b>
<b>2.2. Monitored Parameters</b> .....	<b>9</b>
<b>2.3. Data Collection Methods</b> .....	<b>10</b>
2.3.1. Compliance with Standards .....	10
2.3.2. Data Acquisition .....	10
2.3.3. Validation .....	10
2.3.4. Reporting.....	11
3.0 Air Quality Goals .....	12
4.0 Calibrations and Maintenance .....	13
<b>4.1. Units and Uncertainties</b> .....	<b>13</b>
5.0 Results .....	14
<b>5.1. Data Capture</b> .....	<b>14</b>
<b>5.2. Air Quality Summary</b> .....	<b>16</b>
<b>5.3. Graphic Representations</b> .....	<b>17</b>
Report Summary .....	21
Appendix 1 - Definitions & Abbreviations.....	22

### List of Figures

Figure 1: Lane Cove monitoring network.....	8
Figure 2: CO exposure and single point 3 minutes rolling averages for September 2014 .....	17
Figure 3: CO exposure and single point 15 minutes rolling averages for September 2014 .....	18
Figure 4: CO exposure and single point 30 minutes rolling averages for September 2014 .....	19
Figure 5: CO exposure and single point 3 minutes rolling averages from July to September 2014 (3 monthly trend).....	19
Figure 6: CO exposure and single point 15 minutes rolling averages from July to September 2014 (3 monthly trend).....	20
Figure 7: CO exposure and single point 30 minutes rolling averages from July to September 2014 (3 monthly trend).....	20

### List of Tables

Table 1: Locations and parameters for In-tunnel open path type air quality monitoring.....	7
Table 2: Parameters measured at the Lane Cove monitoring network.....	9
Table 3: Methods .....	10
Table 4: Station/Network Air Quality Goals.....	12
Table 5: Units and Uncertainties.....	13
Table 6: Monthly Data Capture for Lane Cove Tunnel & Military Road E-Ramp monitors for September 2014.....	15
Table 7: Exceedences Recorded for September 2014 .....	16

### Executive Summary

The Lane Cove Tunnel is located in Sydney, Australia and is a 3.6 km twin tunnel motorway under Epping Road that links the M2 Motorway at North Ryde with the Gore Hill Freeway at Artarmon. Ecotech Pty Ltd is contracted by Tollaust Pty Ltd to undertake reporting services for the air quality monitoring system inside the tunnel which ensures that the carbon monoxide (CO) levels inside the Tunnel are always kept to within levels and limits stipulated by the Ministers Conditions of Approval (MCoA) for the Lane Cove Tunnel.

Continuous measurements of CO inside the tunnel are recorded, validated and reported to Tollaust Pty Ltd on a monthly basis.

Maintenance and calibrations are performed by a third party contractor.

This report presents validated data for the month of September 2014.

During the period 1<sup>st</sup> September 2014 to 30<sup>th</sup> September 2014, CO levels inside the tunnel were within the limits stipulated by the Department of Planning.

### 1.0 Introduction

Ecotech is an independent company contracted by Tollaust Pty Ltd to undertake in tunnel air quality reporting at the Lane Cove Tunnel.

This report presents the validated data for September 2014.

- Describes air quality measurements;
- Reports any readings above the LCT limits;
- Compares monitoring results;
- Has been quality assured;

### 2.0 Monitoring and Data Collection

#### 2.1. Siting Details

The CO In tunnel monitoring network consists of

- Twenty eight separate CO monitors attached to the walls and portals of both eastbound and westbound tunnels

**Table 1: Locations and parameters for In-tunnel open path type air quality monitoring**

Monitoring Location	Parameters Measured
	CO
A	x
B	x
C	x
F	x
G	x
H	x
I	x
J	x
M	x
N	x
Q	x
R	x
S	x
T	x
U	x
V	x
W	x
X	x
Y	x
Z	x
AA	x
AB	x
AC	x
AG	x
AH	x
AI	x
AJ	x
AK	x
AL	
AM	
AN	
TOTAL	28

Non-highlighted rows – tunnel wall monitors; light grey highlighted rows – portal located monitors; dark grey highlighted rows –in ventilation stack monitors

# Lane Cove Tunnel & Military Road E-Ramp

## Report No: DAT8697

Tollaust Pty Ltd

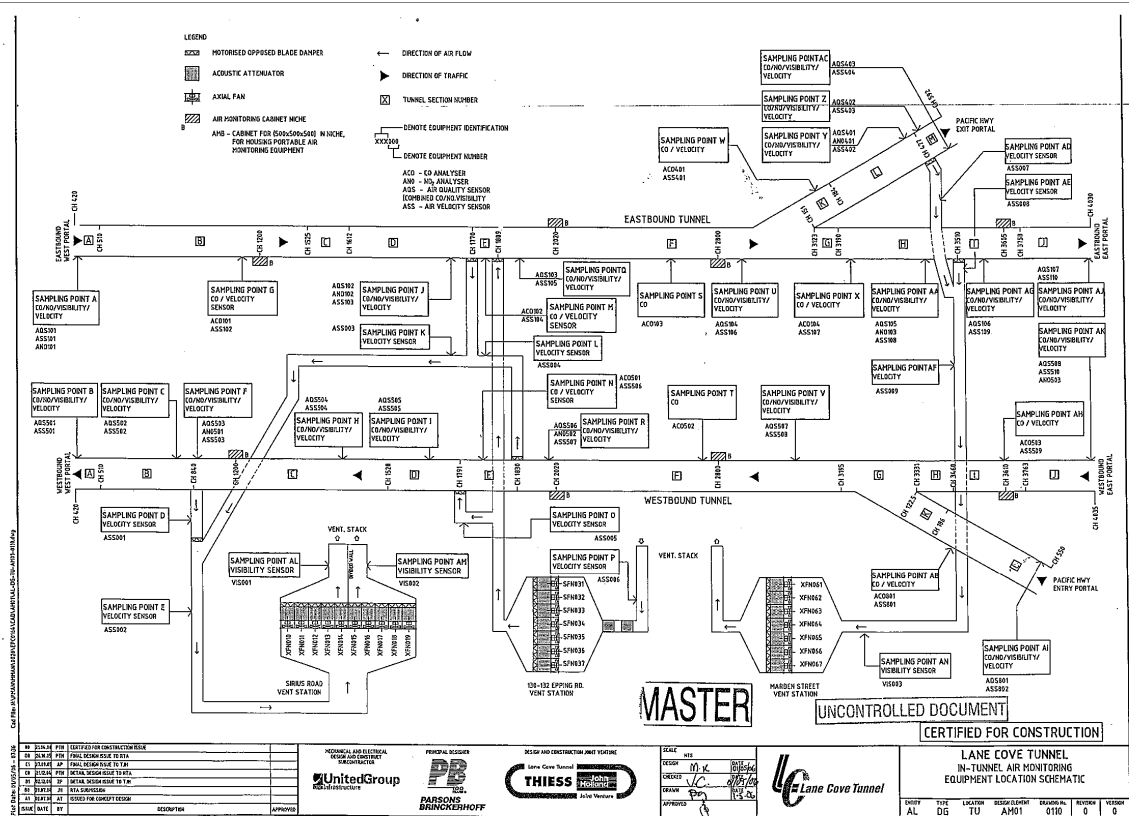


Figure 1: Lane Cove monitoring network



### 2.2. Monitored Parameters

Table 1 below details the parameters monitored and the instruments used at the monitoring network. Appendix 1 defines any abbreviated parameter names used throughout the report.

**Table 2: Parameters measured at the Lane Cove monitoring network**

Parameter Measured	Instrument and Measurement Technique
CO	CODEL TunnelCraft III AQM – Infrared Gas Cell Correlation.

### 2.3. Data Collection Methods

Table 3 below shows the methods used for data collection. Any deviations from the stated methods are detailed in section 2.3.1.

**Table 3: Methods**

Parameter Measured	Data Collection Methods Used	Description of Method
CO	Codel Tunnel Master Open Path - infrared	This method involves projecting an infrared beam across a 3 meter section of the tunnel into a reflector and the reflected light is received by a transceiver which measures the specific absorption

Carbon monoxide (CO) levels are measured inside the tunnel using a network of 28 separate CO monitors attached to the walls of both eastbound and westbound tunnels. The monitors measure CO using an analytical method known as non-dispersive infra-red absorption with gas filter correlation. Basically this involves projecting an infra-red beam across a 3 meter section of the tunnel and measuring the amount of infra-red light absorbed by CO molecules in the path of the beam. The quantity of infra-red light absorbed is proportional to the concentration of CO in the path of the beam. The monitors used were specially designed for use in road tunnels where access for routine essential maintenance is restricted by the need to minimise traffic disruption. Similar monitors are widely used in other road tunnels in Australia and worldwide.

The CO method of analysis is similar to the standard method AM-6 outlined in "NSW EPA 2001, Approved Methods for Sampling and Analysis of Pollutants in New South Wales." However the method differs from the standard principally by the use of the open beam type instrument as described above in place of a closed analytical cell and sample delivery pump as typically used in ambient air monitoring stations. This deviation from the standard method has been approved by the Department of Planning on the advice of an independent consultant with specialist expertise in the field of air quality monitoring.

#### 2.3.1. Compliance with Standards

Unless stated below, parameters are monitored at the Lane Cove Tunnel & Military Road E-Ramp stations according to the methods detailed in Table 3 above.

#### 2.3.2. Data Acquisition

Data acquisition is performed using the LCT-MRE Pty Ltd hardware and software on a weekly basis. The recorded data is remotely collected from the remote PC on a daily basis (using Airodis™ version 5.0) and stored at Ecotech's Environmental Reporting Services (ERS) department in Melbourne, Australia. Data samples are logged in 1 minute intervals. Data Validation and Reporting

#### 2.3.3. Validation

Ecotech ERS maintains two distinct databases containing non-validated and validated data respectively.

The validated database is created by duplicating the non-validated database and then flagging data affected by instrument faults, calibrations and other maintenance activities. The data validation software requires the analyst to supply a valid reason (e.g. backed by maintenance notes, calibration sheets etc) in the database for flagging any data as invalid.

Details of all invalid or missing data are recorded in the Valid Data Exception Tables.

Validation is performed by the analyst, and the validation is reviewed. Graphs and tables are generated based on the validated one minute data.

Validation is limited by the information provided by Tollaust.

### 2.3.4. Reporting

The reported data is in a Microsoft Excel format file named "Lane Cove CO In tunnel Data Report\_September14.xls" included as an appendix to this report.

The Excel file(s) consists of 3 Excel worksheets:

1. Cover
2. Max Single Point 3, 15 and 30 m
3. Valid Data Exception Table

The data contained in this report is based on Australian Eastern Standard Time.

All averages are calculated from the one minute data. Averages are based on a minimum of 75% valid readings within the averaging period.

Averaging periods of eight hours or less are reported for the end of the period, i.e. the hourly average 02:00am is for the data collected from 1:00am to 2:00am. One hour averages are calculated based on a clock hour.

### 3.0 Air Quality Goals

The air quality goals for pollutants monitored at the Lane Cove Tunnel & Military Road E-Ramp monitors are based on the Ministers Conditions of Approval (MCoA) for the Lane Cove Tunnel. The air quality goals are shown in Table 4 below.

**Table 4: Station/Network Air Quality Goals**

Parameter	Time Period	Exceedence Level	Units	Applicable MCoA
CO	30 minutes rolling averages	50	ppm	MCoA 160
	15 minutes rolling averages	87	ppm	MCoA 160
	3 minutes rolling averages	200	ppm	MCoA 161

## 4.0 Calibrations and Maintenance

### 4.1. Units and Uncertainties

The uncertainties for each parameter have been determined by the manufacturer's tolerance limits of the equipment's parameters, and by the data collection standard method.

The reported uncertainties are expanded uncertainties, calculated using coverage factors which give a level of confidence of approximately 95%.

**Table 5: Units and Uncertainties**

Parameter	Units	Resolution	Uncertainty	Measurement Range
CO	ppm	0.1 ppm	$\pm 1.0$ ppm or 2% of span	0 ppm to 100 ppm

## 5.0 Results

### 5.1. Data Capture

Data capture is based on 1 minute data, and refers to the amount of available data collected during the report period.

The percentage of data captured is calculated using the following equation:

$$\text{Data capture} = (\text{Reported air quality data} / \text{Total data}) \times 100\%$$

Where:

- Reported air quality data = Number of instrument readings which have been validated through a quality assured process and excludes all data errors, zero data collection due to calibration, failures and planned and unplanned maintenance.
- Total data = Total number of instrument readings since the start of the term assuming no maintenance, errors, loss of data or calibration.

Table 7 below displays data capture statistics for September 2014.

Details of all invalid or missing data affecting data capture are included in the Valid Data Exception Table, see attached Excel file.

**Table 6: Monthly Data Capture for Lane Cove Tunnel & Military Road E-Ramp monitors for September 2014**

CO	
Monitoring Location	Data Capture (%)
ACO101	93.9
ACO102	93.8
ACO103	91.9
ACO104	94.6
ACO401	93.8
ACO501	93.9
ACO502	94.6
ACO503	94.6
ACO801	93.8
AQS101	88.4
AQS102	93.8
AQS103	93.3
AQS104	90.3
AQS105	94.6
AQS106	94.6
AQS107	94.5
AQS401	93.8
AQS402	93.8
AQS403	59.1
AQS501	93.1
AQS502	94.5
AQS503	93.8
AQS504	93.8
AQS505	92.7
AQS506	93.2
AQS507	94.5
AQS508	94.5
AQS801	93.8

### 5.2. Air Quality Summary

During the period 1<sup>st</sup> September 2014 to 30<sup>th</sup> September 2014, CO levels inside the tunnel were within the limits stipulated by the Department of Planning.

**Table 7: Exceedences Recorded for September 2014**

Parameter	Time Period	Value of Exceedence	Date of Exceedence	Station
CO	3 minutes rolling averages	-	-	-
	15 minutes rolling averages	-	-	-
	30 minutes rolling averages	-	-	-



### 5.3. Graphic Representations

Validated 1 minute data for CO were used to construct the following monthly graphic representations.



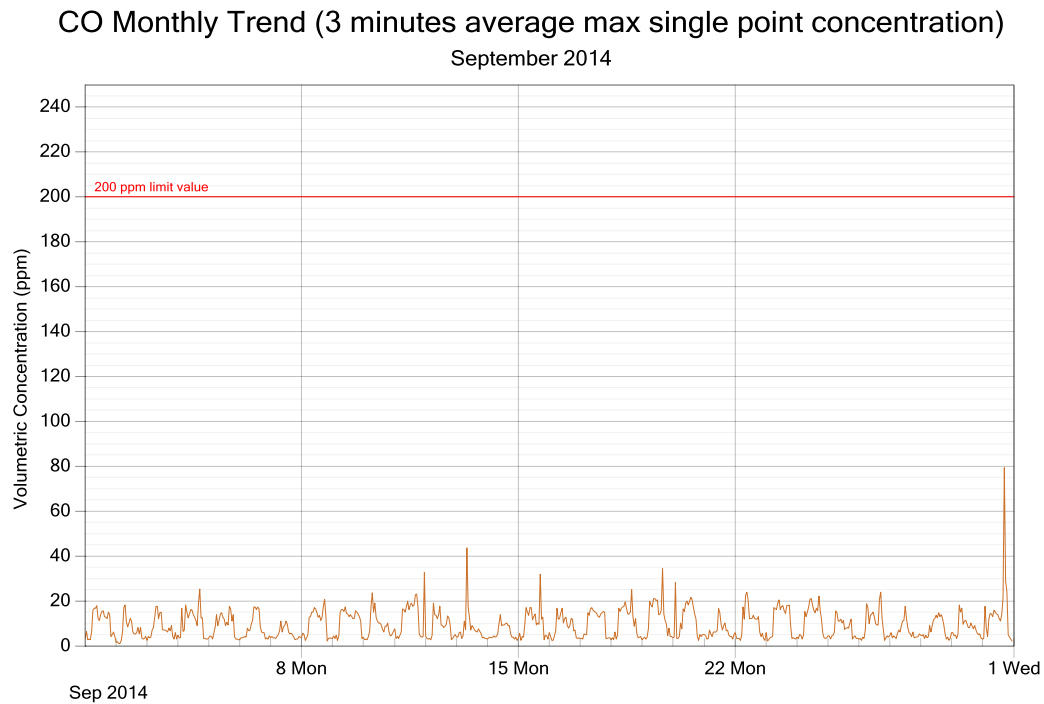



Figure 2: CO exposure and single point 3 minutes rolling averages for September 2014

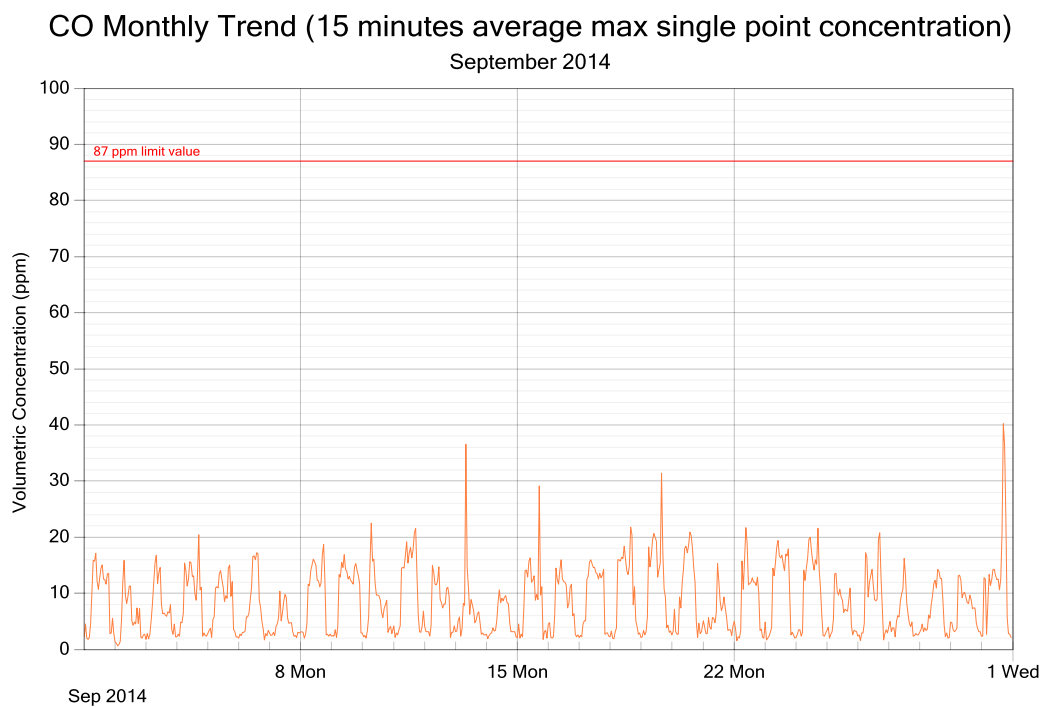


**Figure 3: CO exposure and single point 15 minutes rolling averages for September 2014**

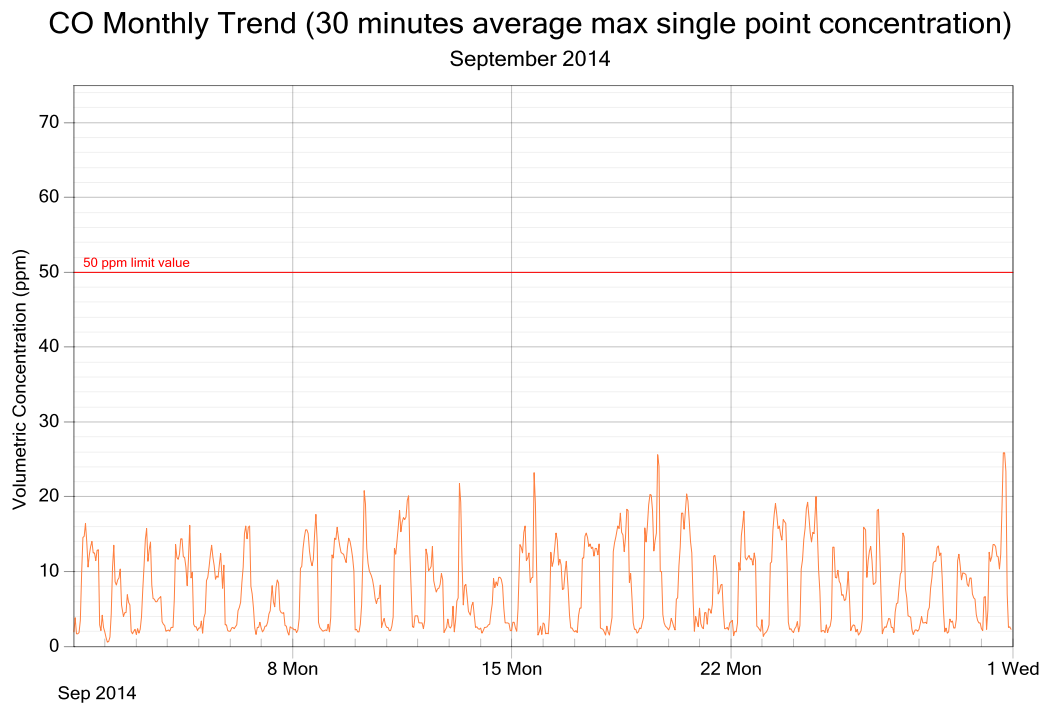


**Figure 4: CO exposure and single point 30 minutes rolling averages for September 2014**

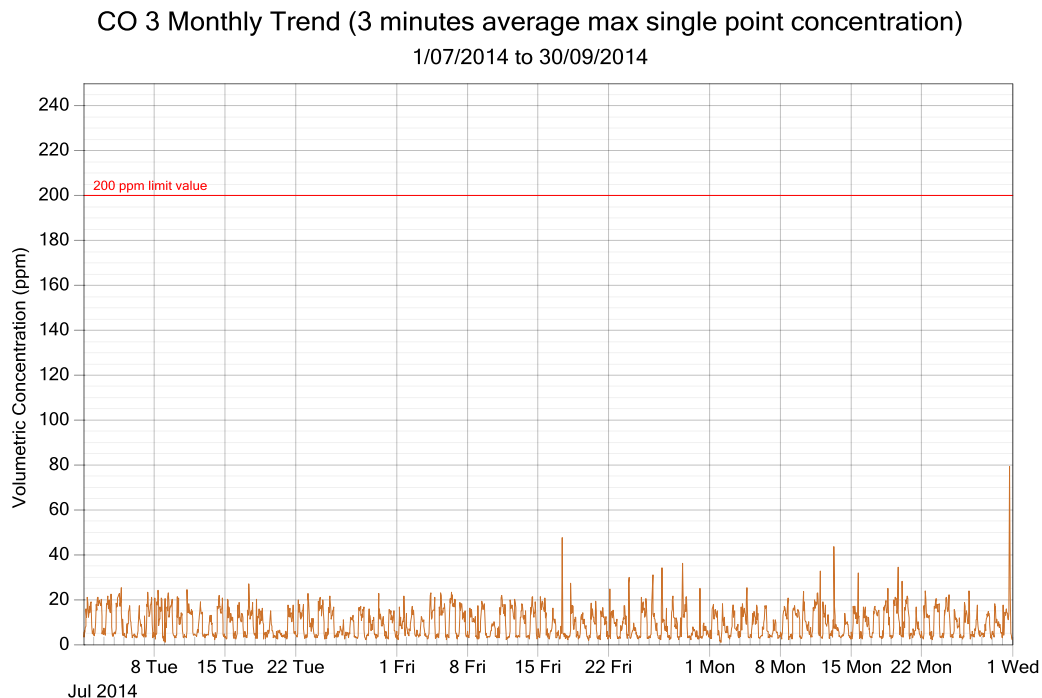

**Figure 5: CO exposure and single point 3 minutes rolling averages from July to September 2014 (3 monthly trend)**

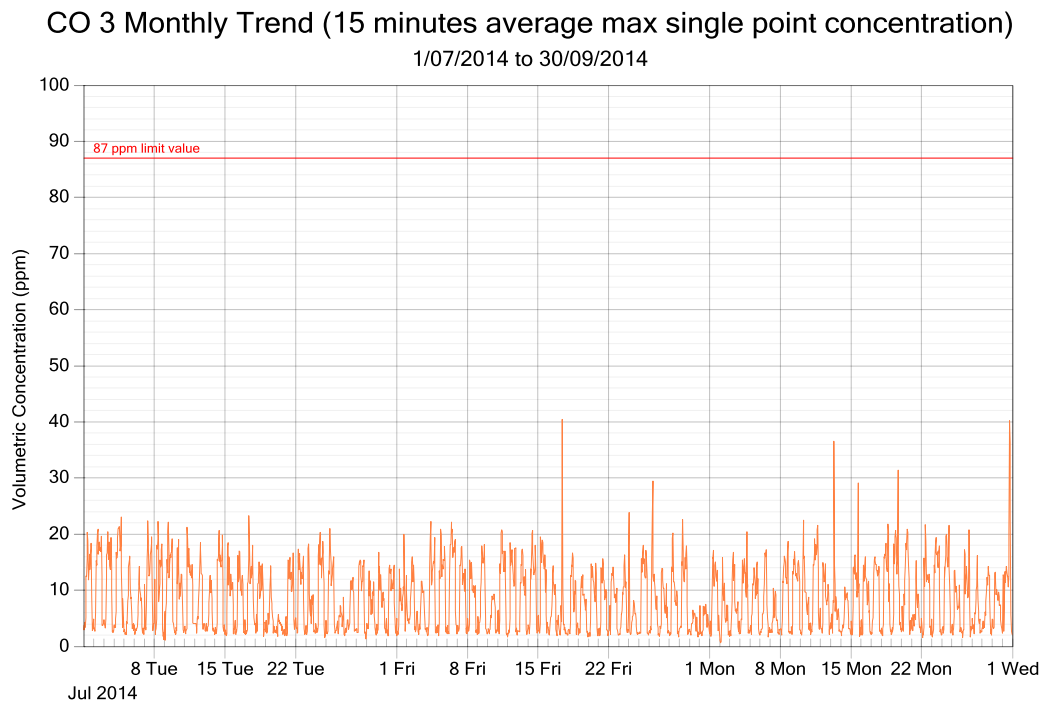

**Figure 6: CO exposure and single point 15 minutes rolling averages from July to September 2014 (3 monthly trend)**

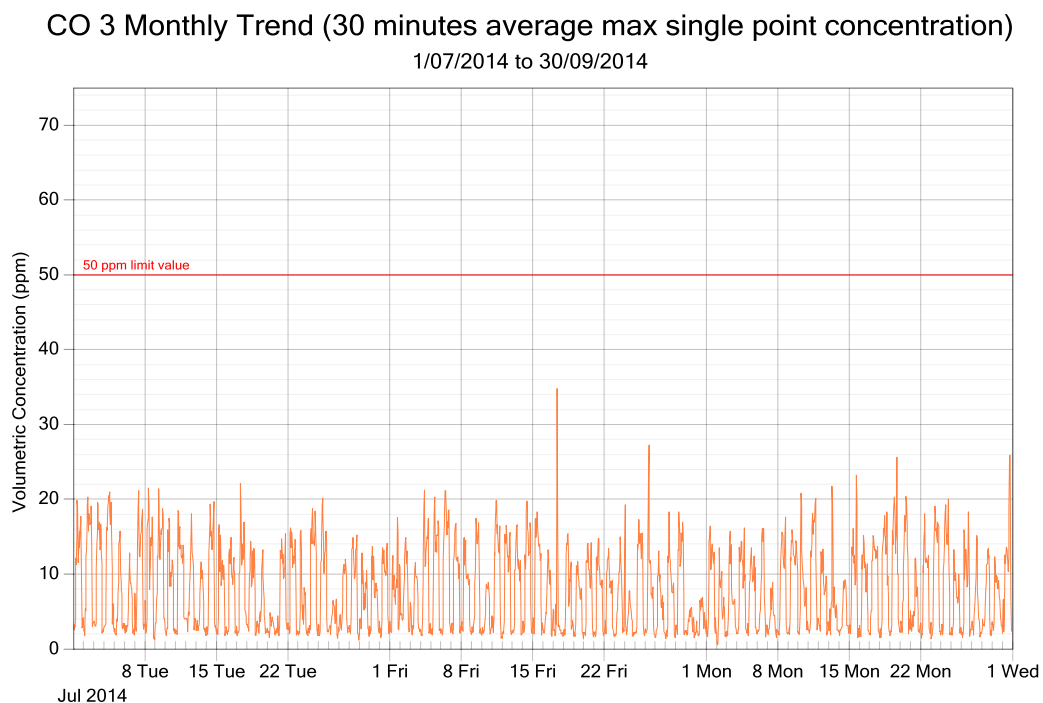

**Figure 7: CO exposure and single point 30 minutes rolling averages from July to September 2014 (3 monthly trend)**

### Report Summary

- During the period in September 2014, CO levels inside the tunnel were within the limits stipulated by the Department of Planning.

-----END OF REPORT-----

### Appendix 1 - Definitions & Abbreviations

CO	Carbon monoxide
ppb	Parts per billion
ppm	Parts per million



## **Head Office**

1492 Ferntree Gully Road  
Knoxfield VIC 3180 Australia

**Phone:** (03) 9730 7800

**Email:** [info@ecotech.com.au](mailto:info@ecotech.com.au)

## **Blast Monitoring**

**Phone:** (03) 9730 7889

**Email:** [blastsupport@ecotech.com.au](mailto:blastsupport@ecotech.com.au)

## **Regional Offices**

### **NSW**

**Phone:** (02) 8707 7400

**Email:** [sydney@ecotech.com.au](mailto:sydney@ecotech.com.au)

### **QLD**

**Phone:** (07) 3393 7400

**Email:** [qld@ecotech.com.au](mailto:qld@ecotech.com.au)

### **WA**

**Phone:** (08) 9434 7800

**Email:** [perth@ecotech.com.au](mailto:perth@ecotech.com.au)

## **Worldwide**

**Phone:** (+61) 1300 364 946

**Fax:** (+61) 1300 364 946

**Email:** [info@ecotech.com.au](mailto:info@ecotech.com.au)

**[www.ecotech.com.au](http://www.ecotech.com.au)**